


SERIE EP-DA/E (Centrifugal fan with double inlet)




- Suitable to convey clean air with temperatures until 60°C
- Motors made by VENTILMOTOR, class F insulation, enclosed building with proof bearing, for single and three phases input; speed regulator on demand
- Extractible unit ventilator (motor+impeller)
- Made in zinc plated steel

TECHNICAL FEATURES:

- Electrical motor double polarity, 1400/900 revs. per min. : Air flow from 650 to 7500 m³/h with Pressure until 56 mm H₂O
- Electrical motor double polarity, 900/700 revs. per min. : Air flow from 1200 to 27000 m³/h with Pressure until 66 mm H₂O

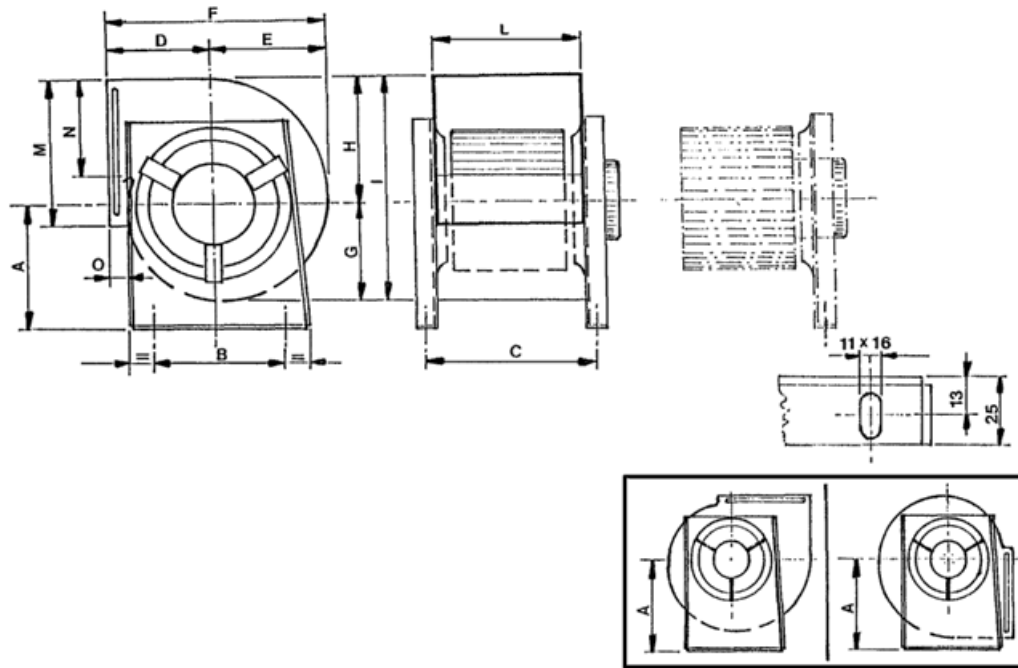

EP-DA/E	A	B	C	D	E	F	G	H	I	L	M	N	O
9/7	255	298	258	183	197	380	173	219	392	232	260	185	38
9/9	255	298	326	183	197	380	173	219	392	300	260	185	38
10/8	285	339	293	202	219	421	194	247	441	267	289	213	37
10/10	285	339	359	202	219	421	194	247	441	333	289	213	37
12/9	331	409	409	230	265	495	231	293	524	311	341	245	39
12/12	331	409	422	230	265	495	231	293	524	396	341	245	39

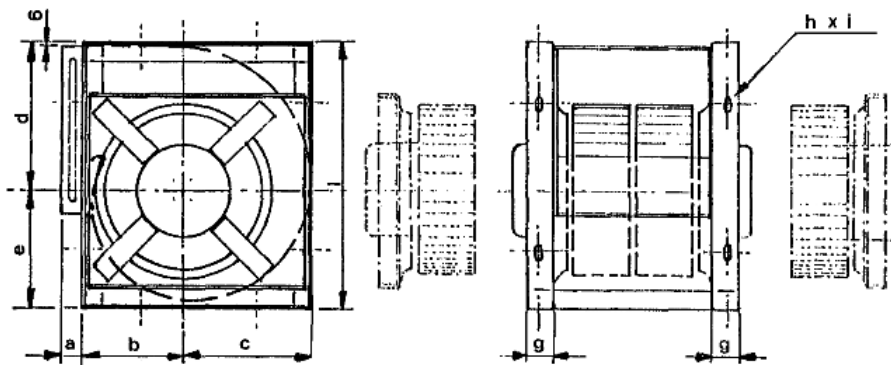

EP-DA/E CUBIK	A	B	C	D	E	F	G	H	I	L	M	N	O
15/15	-	-	-	272	312	584	278	345	623	473	403	270	39
18/18	-	-	-	320	377	697	333	415	748	557	480	335	42


EP-DA/E CUBIK	a	b	c	d	e	f	g	h x i
15/15	39	233	312	351	351	278	30	12 x 16
18/18	42	278	377	421	421	333	40	14 x 18

EP-DA/E	Rpm	W	Hp	Min./ Max. Flow rate (m ³ /h)	Max. pressure (mm H ₂ O)
9/7	1400	552	0,75	1000 / 4200	43
	900	369	0,5	650 / 2900	17
9/9	1400	552	0,75	1100 / 5500	39
	900	368	0,5	850 / 3700	16
10/8	1400	1104	1,5	1500 / 7000	56
	900	736	1	900 / 4400	24
10/10	1400	1104	1,5	1500 / 7500	56
	900	736	1	900 / 4800	23
12/9	900	1472	2	1600 / 7500	33
	700	736	1	1200 / 5500	21
12/12	900	1472	2	1700 / 7500	30
	700	736	1	1300 / 6000	19
15/15 (CUBIK)	900	2944	4	3000 / 15000	45
	700	2208	3	2400 / 11000	27
18/18 (CUBIK)	900	5520	7,5	6000 / 27000	66
	700	2944	4	4500 / 21000	40

SERIE EP-DA / E 9/7

mm
H₂O


1400 Rpm

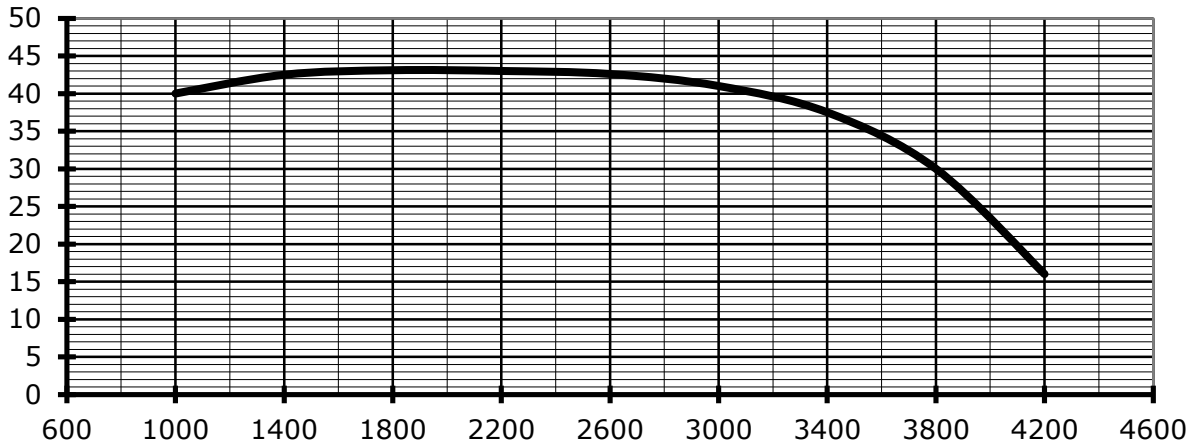

m³/h

mm
H₂O

900 Rpm

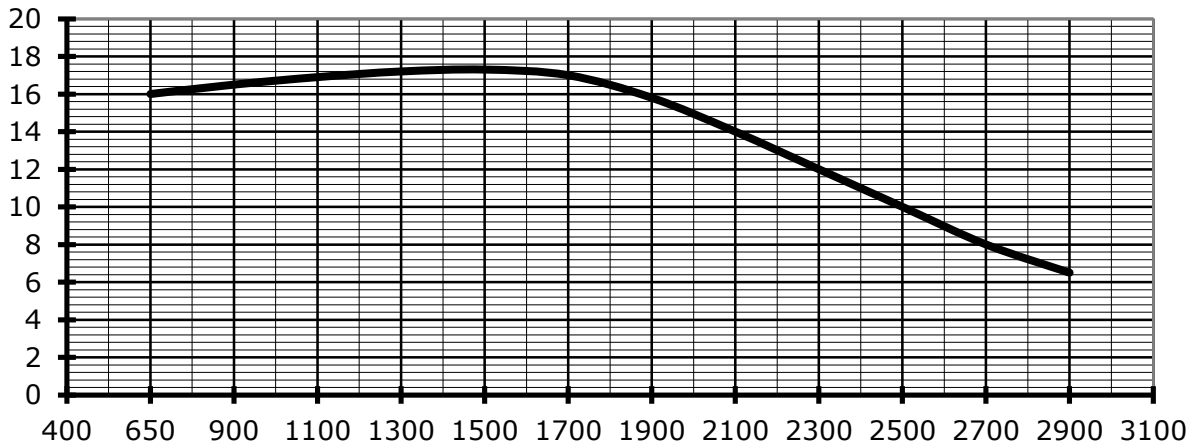


m³/h

SERIE EP-DA / E 9/9

1400 Rpm


mm
H₂O

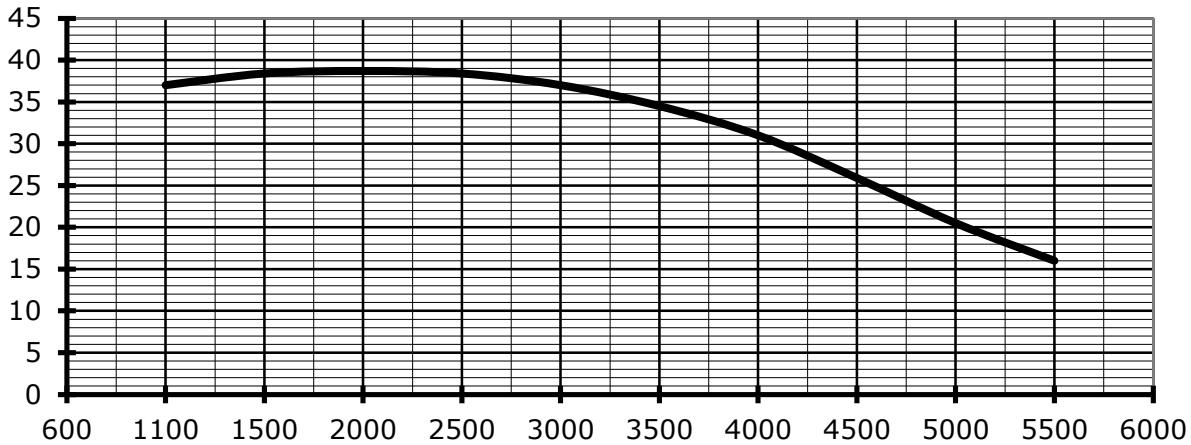

m³/h

900 Rpm

mm
H₂O

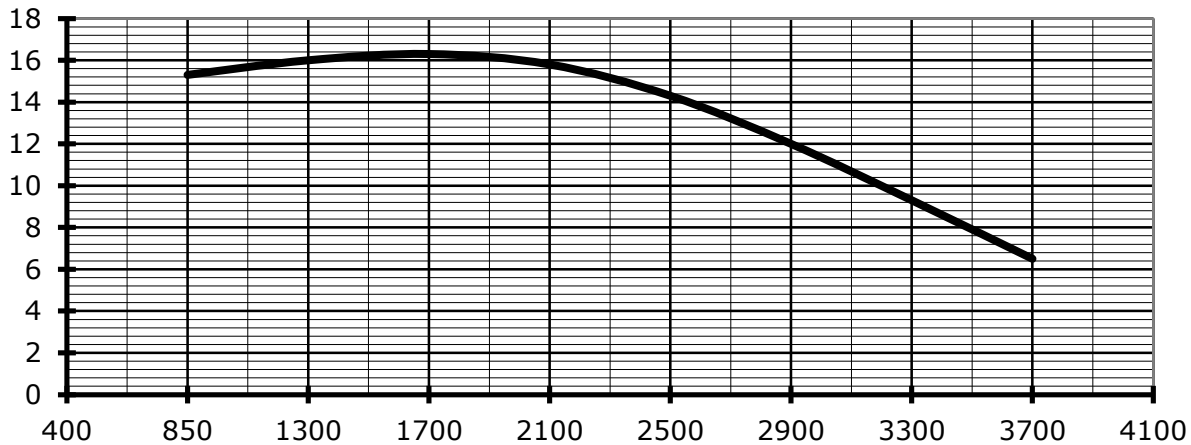


m³/h

SERIE EP-DA / E 10/8

1400 Rpm


mm
H₂O

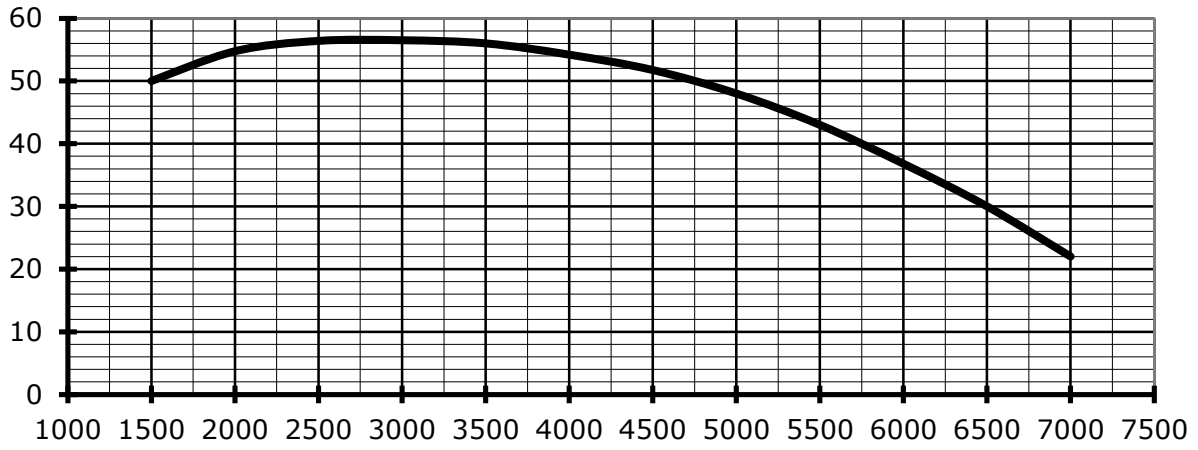

m³/h

900 Rpm

mm
H₂O

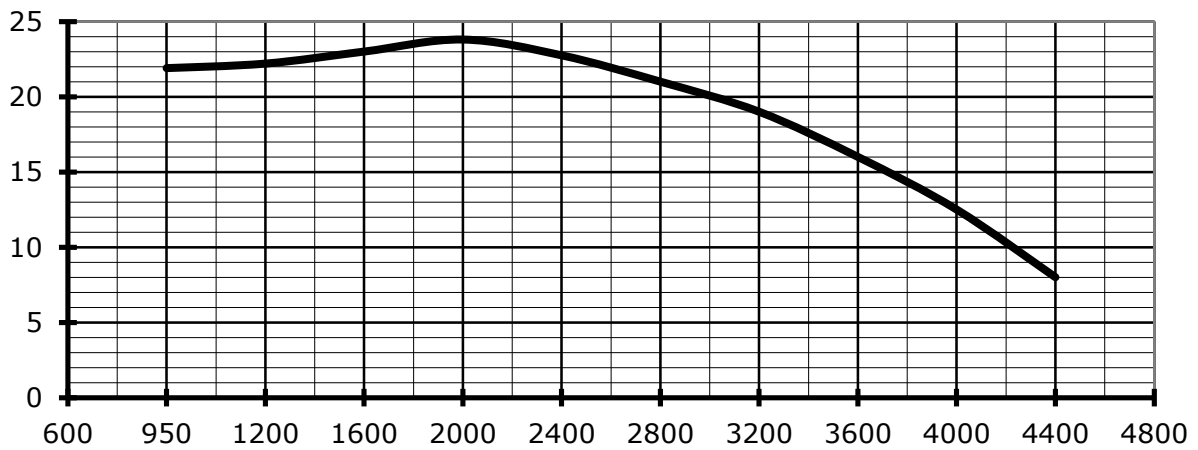


m³/h

SERIE EP-DA / E 10/10

mm
H₂O


1400 Rpm

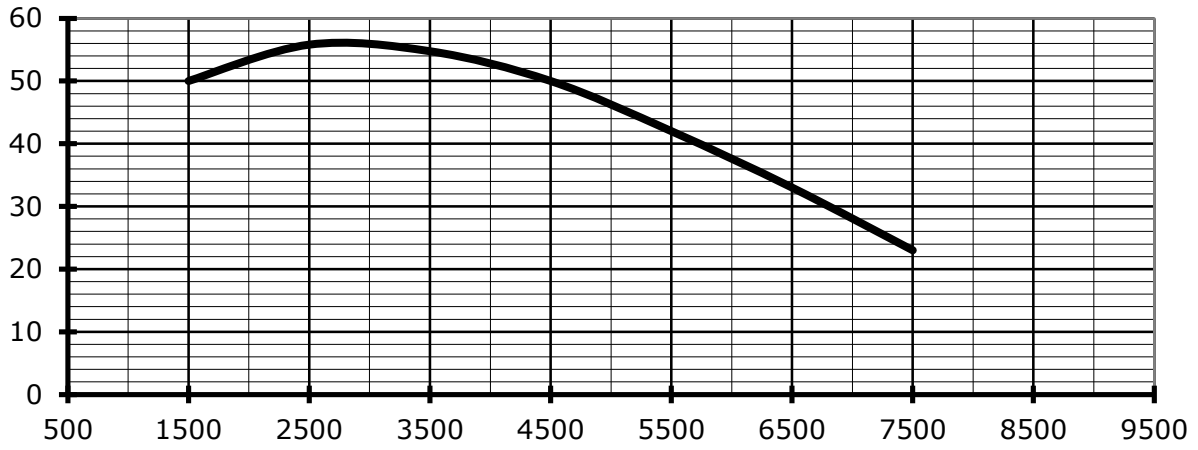

m³/h

mm
H₂O

900 Rpm

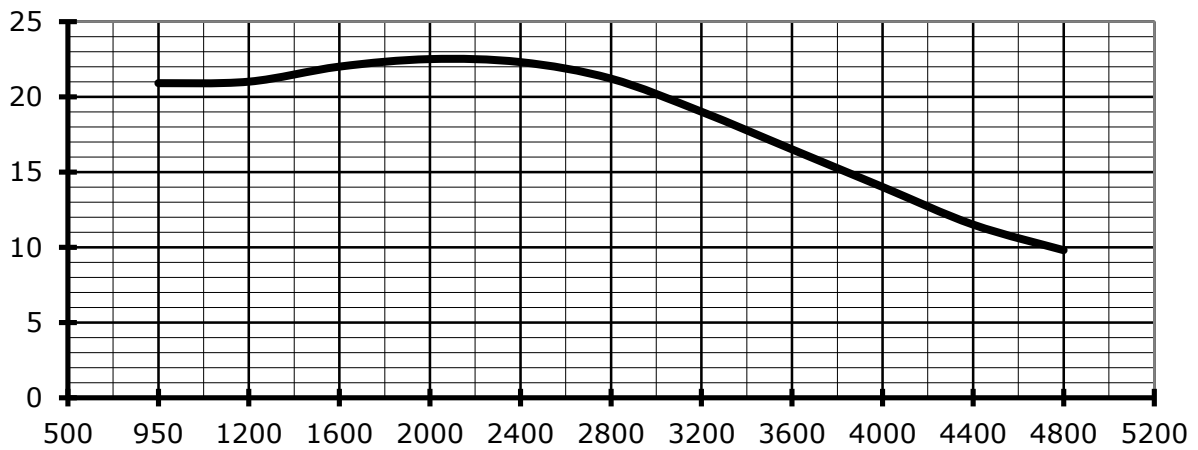


m³/h

SERIE EP-DA / E 12/9

900 Rpm


mm
H₂O

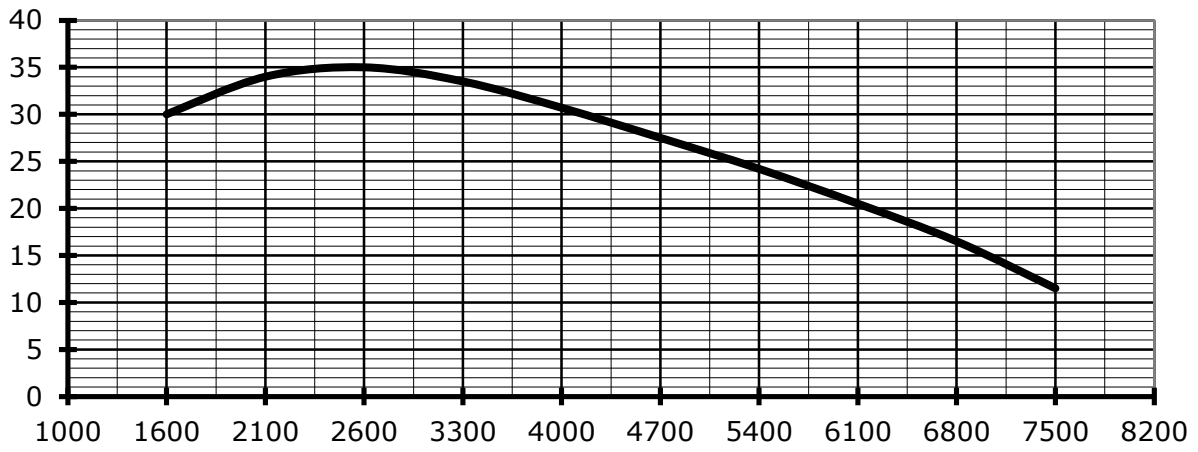

m³/h

700 Rpm

mm
H₂O

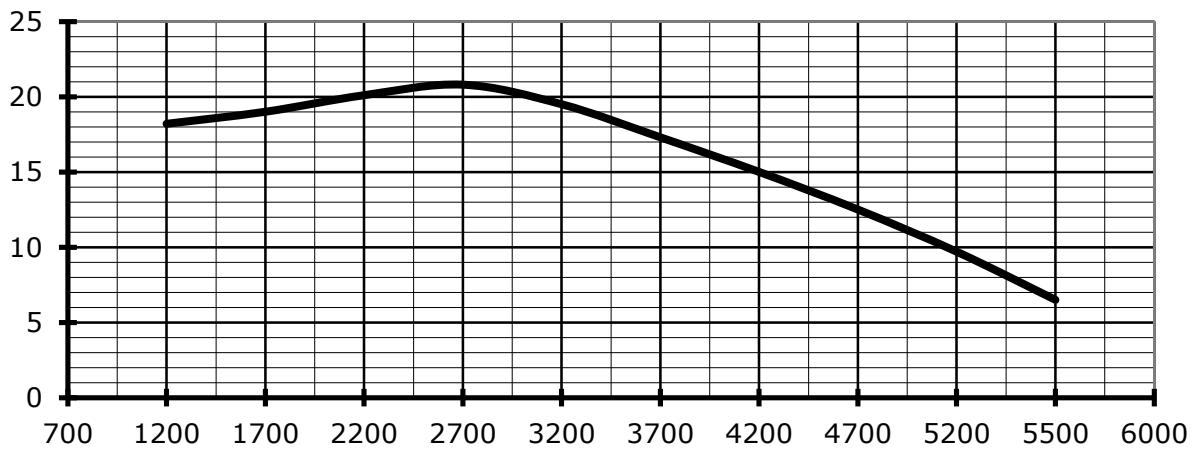


m³/h

SERIE EP-DA / E 12/12

mm
H₂O


900 Rpm

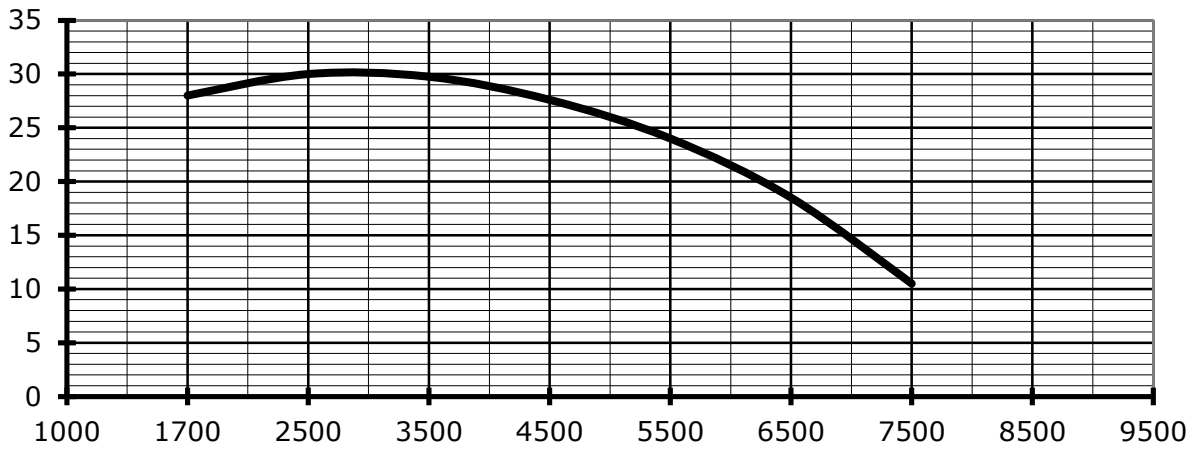

m³/h

mm
H₂O

700 Rpm

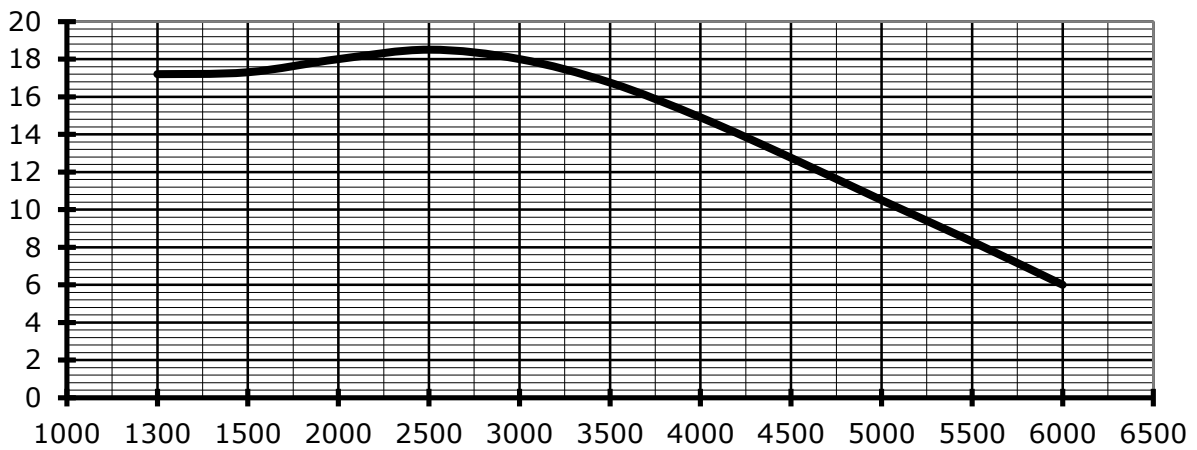


m³/h

SERIE EP-DA / E 15/15 (CUBIK)

mm
H₂O


900 Rpm

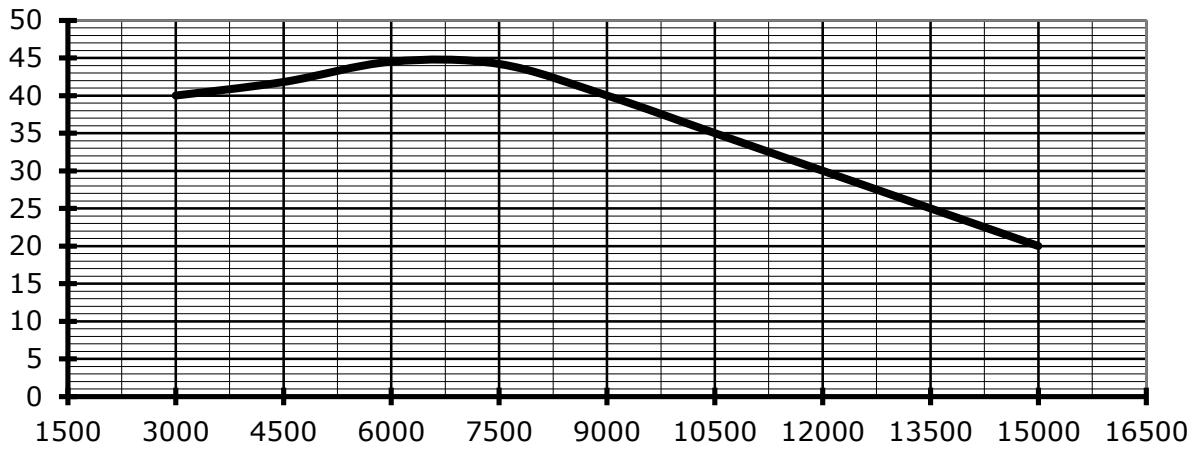

m³/h

mm
H₂O

700 Rpm

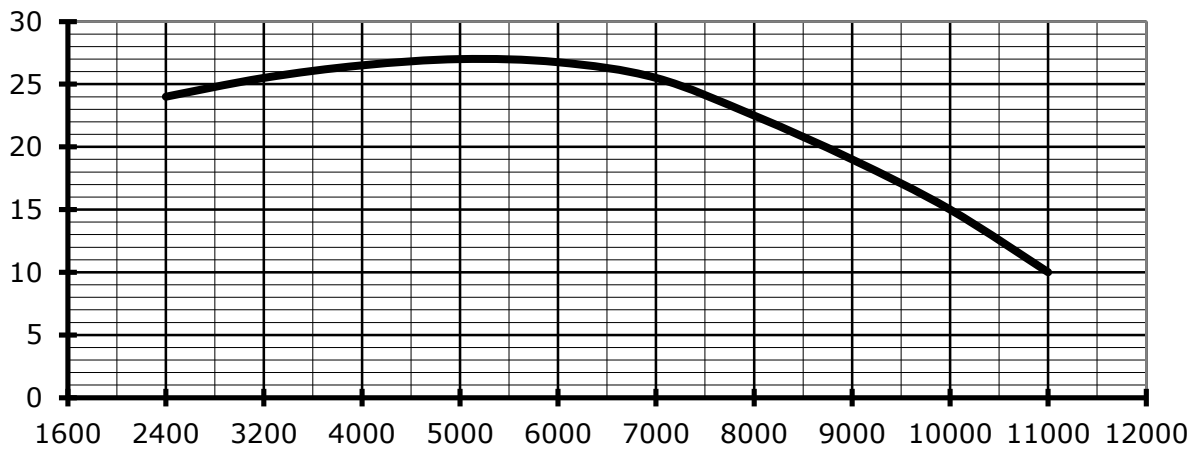


m³/h

SERIE EP-DA / E 18/18 (CUBIK)

900 Rmp


mm
H₂O

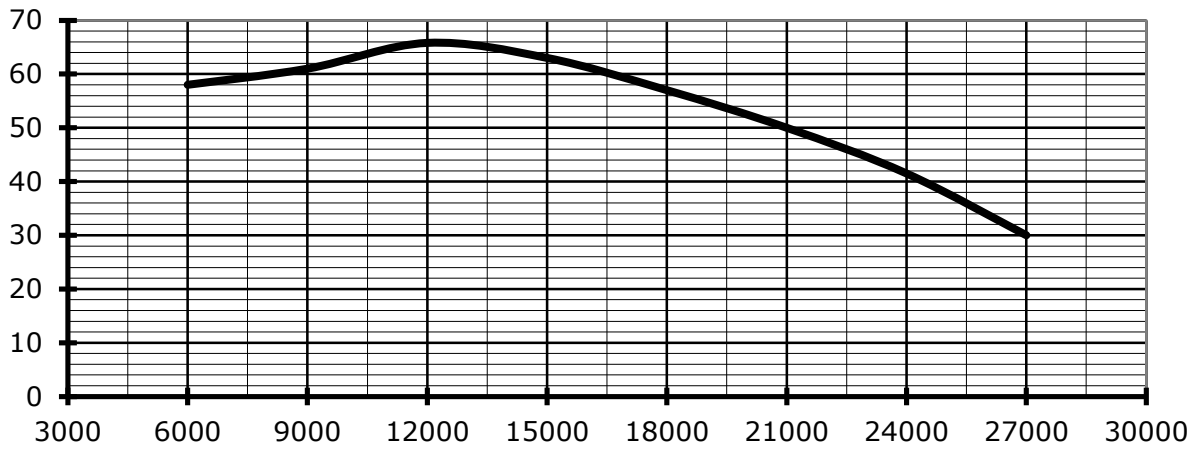

m³/h

700 Rmp

mm
H₂O

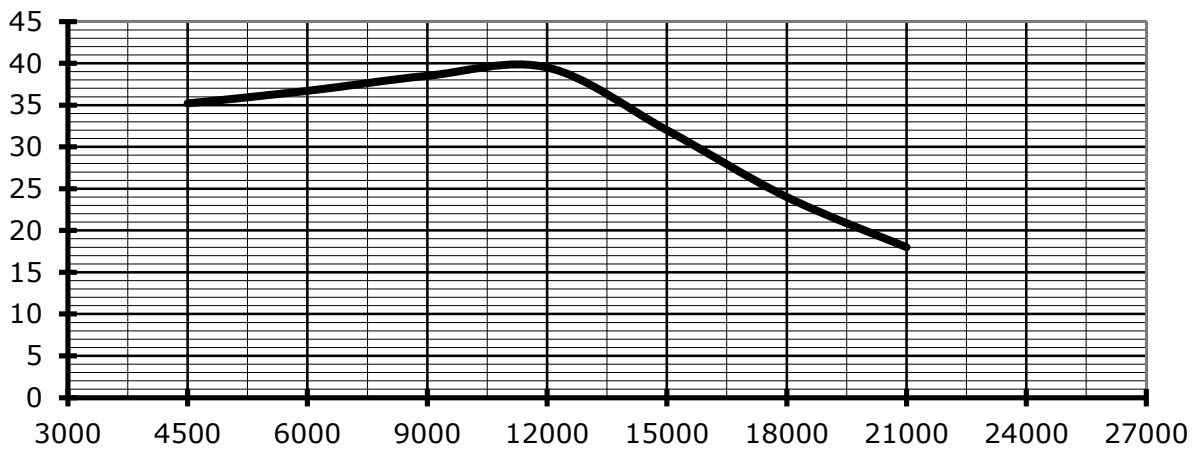

m³/h